

# CEILING/WALL

## CM101 Series VANDAL RESISTANT/HIGH ABUSE CEILING/WALL MOUNT QL INDUCTION

### ORDERING INFORMATION

**SERIES**  
CM101 = CM101 Series

**SIZE** = 12" x 12" x 9"

**LAMP TYPE**  
QL = QL Induction  
PCF = Philips Compact Fluorescent

**LAMP QUANTITY/WATTAGE**  
AA = 1 Lamp 55 Watt (QL)  
A = 1 Lamp 85 Watt (QL)  
B = 1 Lamp 80 Watt (PCF)

**COLOR TEMPERATURE**  
3 = 3000K  
4 = 4000K




**VOLTAGE**  
1 = 120 Volts  
2 = 200-277 Volts

**FINISH**  
BK = Black  
BZ = Bronze (*standard*)  
NA = Natural Aluminum  
WH = White  
CC = Custom Color


**OPTIONS**  
9002 = Tamperproof Screwdriver  
9206 = 120 Volt Integral Photocell  
9221 = 200-277 Volt Integral Photocell  
EB = Electronic Ballast  
FS = GLR Fuse and Holder  
OP = Opal Lens — Injection Molded Polycarbonate  
QMB = Quick Mount Bracket  
QL-R = QL Reflectorized Lamp

### FEATURES/SPECIFICATIONS

- GASKETING— High Temperature, Non-aging black EPDM and/or neoprene rubber concealed in housing pocket & enclosed by cast-in drip shield & rear wire entrance hole to protect against outside contaminants.
- HOUSING— Heavy wall cast aluminum.
- FINISH— Bronze (BZ) Standard Color Oven Baked Polyester Powder Coat. Black (BK), Natural Aluminum (NA), White (WH), Custom Color (CC) optional.
- REFLECTOR— .032 textured aluminum for high efficiency and reduced arc tube voltage rise.
- LENS— .125" thick UV stabilized injection molded clear prismatic high impact polycarbonate. Optional opal.
- BALLAST— Induction High Frequency Electronic.
- LAMP— QL Induction. QL (QL-R) with Reflectorized Lamp optional.
- MOUNTING— Ceiling or Wall Mount.
- OPTIONS— Quick (QMB) Mounting Bracket.
- UL/ULC— Manufactured in conformity to current UL/ULC U.S. and Canadian safety standards - Suitable for wet locations

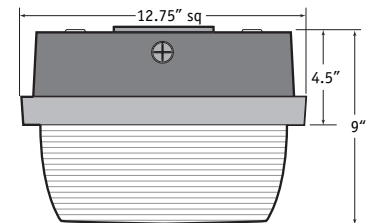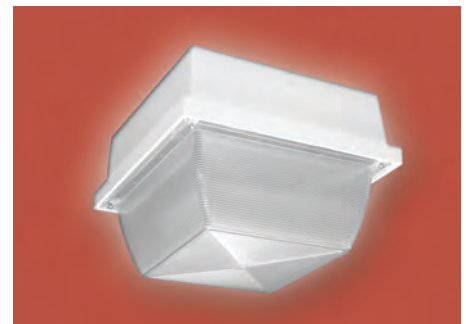

CM101 with Quick Mount Bracket (QMB) option



CM101 shown wall mounted

**EXAMPLE:**  
CM101-QL-A-2-BK

### SUBMITTAL INFORMATION

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Catalog No.: \_\_\_\_\_  
Fixture Type: \_\_\_\_\_